

Automatic Grinder AV 250



Automatic Grinder AV 250

The Seydelmann Automatic Grinder is a powerful and robust machine, that meets the highest quality demands of the end product under optimal hygienic conditions.

Facts

| | |
|-----------------------------|---------------------------------|
| Hole plate diameter: | 250 mm |
| Hourly output: | up to 14000 kg/h 30865 lbs/h |
| Power of motor: | 45/75 kW / 60/101 HP |
| Power of AC-6 motor: | 100 kW / 134 HP |
| Hopper content: | 400 Liters |
| Weight: | 1750 kg / 3858 lbs |
| Weight with loading device: | 2050 kg / 4520 lbs |

Machine design

The machine frame is made of stainless steel and completely closed so that all pipes, motors and other parts are integrated into the machine. All edges are rounded and all surfaces on the machine are polished very precisely and designed with a slope so that cleaning water will drain completely from all surfaces. Thanks to embedded covers and the closed bottom of the machine frame water cannot enter the machine and pollution is prevented.

Flexible loading

Besides the loading via an integrated hydraulic loading device or a vertical loading device loading is also possible via angled conveyor belts or screw conveyors. With a larger hopper volume a loading device for large containers is also available. On request conveyor belts can be equipped with metal detectors.

Applications

Suitable in particular for the cutting of fresh meat, pre-cut frozen meat, cooked meat, fish, vegetables, fruits and other edibles from -18 °C to 85 °C (0 °F to 185 °F).

System

Due to its wide conical feeding worm, the Automatic Grinder AV 250 cuts fresh or cooked meat as well as pre-cut frozen meat, and large pieces of meat or fat. The rectangular arrangement of the working and the feeding worm allow maximum efficiency. Thanks to the six pre-programmable speeds of the optionally available AC-6 drive, any material can be ideally processed and the best possible cut is guaranteed. Both drives (feeding & working worm) are frequency controlled. The feeding worm regulates the speed depending on the load of the working worm.




Maschinenfabrik Seydelmann KG

info@seydelmann.com Tel. +49 (0)711 / 49 00 90-0 Hoelderlinstrasse 9
www.seydelmann.com Fax +49 (0)711 / 49 00 90-90 70174 Stuttgart, Germany

Cutters · Mixers · Grinders
Emulsifiers · Production Lines

Measurements (BW 200)

- H1 = 750 mm / 29.5 in
- H2 = 1789 mm / 70.4 in
- H3 = 2975 mm / 117.1 in
- H4 = 350 mm / 13.8 in
- T1 = 1156 mm / 45.5 in
- T2 = 1494 mm / 58.8 in
- T3 = 1948 mm / 76.7 in
- T4 = 1588 mm / 62.5 in
- T5 = 1733 mm / 68.2 in
- B1 = 1626 mm / 64.0 in
- B2 = 2392 mm / 94.2 in
- B3 = 2849 mm / 112.2 in

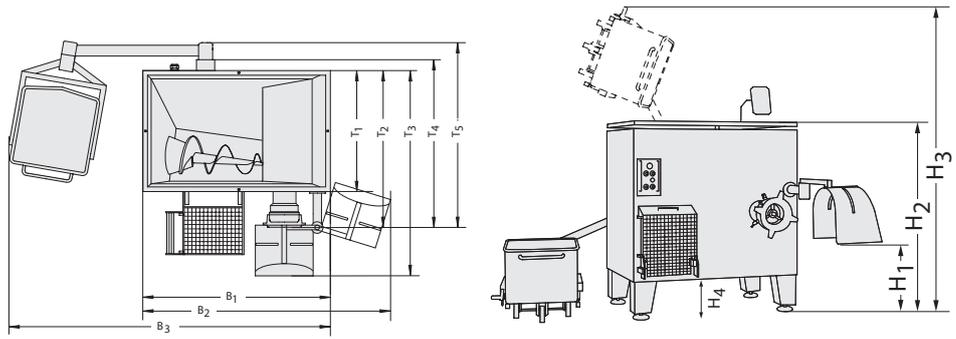

Top view: Hopper



Bayonet locking



Sensor for product level (optional)

Standard equipment

- Two-speed working worm, three-speed feeding worm
- Conical feeding worm
- Standard cutting set
- Thermal overload control
- Outlet protection device
- Hopper safety frame
- Bayonet locking
- Worm ejector
- Control panel with pressure & rotary switch
- Embedded covers

Additional equipment

- Six-speed frequency controlled, four-speed frequency controlled feeding worm
- Backwards running feeding worm
- Integrated hydraulic loading device or vertical loading device
- AC-stepless main drive & Command 700 W
- Outside knife
- Separating set
- Hydraulic worm ejector
- Pneumatic separating device
- Two-stage separating set
- Fat analysis: NIR analysis / X-ray analysis
- Sensor for product level via laser
- Outlet tube
- Holding device
- Swivel mounted control panel
- Two-hand operation for cleaning
- Anti-block unit
- Separate electrical cabinet, stainless steel with main power switch
- Worm cradle
- Working platform
- Variable hopper content (800 / 1000 l)

Control: Command 700 W

- Stepless preprogramming of main- and conveyor drive speeds
- Digital display of speeds, time and current consumption
- Waterproof stainless steel box
- Mounting on machine or wall
- Display of error indication
- Display of maintenance- & service intervals



Command 700 W (optional with frequency controlled AC-6 main drive)



Pneumatic separating device (optional)



Separating set (optional)

Maschinenfabrik Seydelmann KG

info@seydelmann.com Tel. +49 (0)711 / 49 00 90-0 Hoelderlinstrasse 9
 www.seydelmann.com Fax +49 (0)711 / 49 00 90-90 70174 Stuttgart, Germany

**Cutters · Mixers · Grinders
 Emulsifiers · Production Lines**