



# Flattening conveyor



**INNOVATIVE | FLEXIBLE | RELIABLE**

INNOVATIVE | FLEXIBLE | RELIABLE


Excellent  
artisanial  
product look







This results in a high output of perfectly shaped flat products with very low thickness tolerances.

Suitable for meat, fish, chicken and PBP/vega products. Besides hamburgers, stuffed cheese products, stuffed meat disks, Cordon bleu's and the famous German Frikadellen.

Specifications

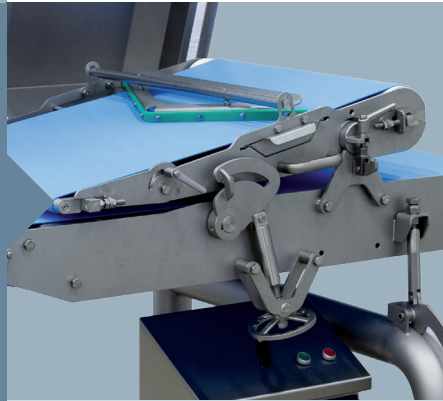

- Inlet opening: up to 65 mm
- Adjustable belt angle
- Belt speed: 2 – 12 m/min
- Belt width: 400, 600, 1.000 and 1.200 mm
- Automatic synchronized belt speed



De Rietkraag 7  
NL-8082 AA Elburg  
The Netherlands

+31 (0)525 652 088

info@djmfoodprocessing.nl  
www.djmfoodprocessing.nl



INNOVATIVE | FLEXIBLE | RELIABLE

Type	Belt width	Total length	Total width	Total height
FC-400	400 mm	1.892 mm	859 mm	1.267 mm
FC-600	600 mm	1.887 mm	1.081 mm	1.297 mm
FC-1000	1.000 mm	1.890 mm	1.480 mm	1.297 mm
FC-1200	1.200 mm	1.889 mm	1.681 mm	1.297 mm

40  
YEARS

More than 40 years experience in designing,  
producing and servicing excellent food processing  
machines by an innovative & committed team of experts.